

Ver 1.2

Radiation-Hardened SRAM

Datasheet

Part Number: B6664RH



北京微电子技术研究所
Beijing Microelectronics Technology Institute
中国航天

Page of Revise Control

Version No.	Publish Time	Revised Chapter	Revise Introduction	Note
1.0	12.21.2016		Document creation	
1.1	10.15.2017	7	Advance Packaging information	
1.2	03.06.2018		Text and wording modifications	

TABLE OF CONTENTS

1.	<i>Features</i>	1
2.	<i>General Description</i>	1
3.	<i>Pin Description</i>	2
4.	<i>Pin Configurations (Appendix 1)</i>	3
5.	<i>Product Description</i>	3
5.1	Function Description	3
5.2	Recommended Operating Conditions	4
6.	<i>Electrical Characteristics</i>	4
6.1	DC Electrical Characteristics	4
6.2	Read Cycle AC Electrical Characteristics	6
7.	<i>Packaging</i>	8
	<i>Appendix 1</i>	10

1. Features

- Asynchronous operation, functionally compatible with HS-6664RH PROM
- 45 ns maximum access time (-55°C ~ 125°C)
- TTL compatible inputs and TTL/CMOS compatible outputs levels, three-state bidirectional data bus
- Voltage supply: 4.5V ~ 5.5V
- Operational environment:
 - Total-dose: 100 K Rad (Si)
 - SEL: > 75 MeV·cm²/mg
 - SEU (Logic): > 37 MeV·cm²/mg
 - SEU (Memory Cell): > 75 MeV·cm²/mg
- Packaging options:
 - 28-lead DIP

2. General Description

The B6664RH PROM is a high performance, asynchronous, radiation-hardened, 8K x 8 programmable memory device. The B6664RH PROM features fully asynchronous operation requiring no external clocks or timing strobes and is functionally compatible with HS-6664RH. B6664RH needs to be programmed by the special programmer. The combination of radiation-hardness, fast access time, and low power consumption make the B6664RH ideal for high speed systems designed for operation in radiation environments.

3. Pin Description

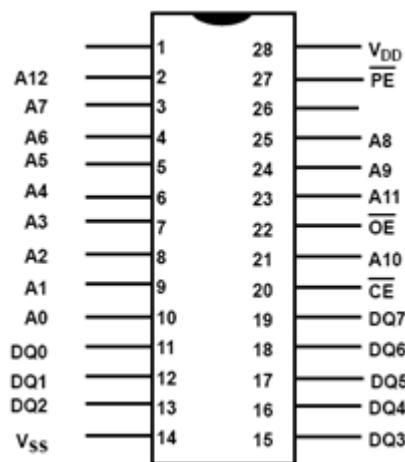


Figure 1 B6664RH PROM Pin Figuration

Table 1. Pin Names

Pin Names	Functions
A0~A12	Address
DQ0~DQ7	Data Input / Output
CE	Chip Enable (Active Low)
PE	Program Enable (Active Low)
OE	Output Enable (Active Low)
V _{DD}	Power (5 V)
V _{SS}	Ground

4. Pin Configurations (Appendix 1)

5. Product Description

5.1 Function Description

The B6664RH has three control inputs: Chip Enable (\overline{CE}), Program Enable (\overline{PE}), and Output Enable (\overline{OE}); fifteen address inputs, A(12:0); and eight bidirectional data lines, DQ(7:0). \overline{CE} is the device enable input that controls chip selection, active, and standby modes. Asserting \overline{CE} causes the decode of the fifteen address inputs and one of 8192 words in the memory is selected. \overline{PE} controls program and read operations. During a read cycle, \overline{OE} must be asserted to enable the outputs.

Table 2. Device Operation Truth Table

Inputs			Outputs	
\overline{OE}	\overline{PE}	\overline{CE}	I/O Mode	Mode
X ¹	1	1	DQ(7:0) 3-State	Standby
0	1	0	DQ(7:0) Data out	Read
1	0	0	DQ(7:0) Data in	Write
1	1	0	DQ(7:0) 3-State	Read

Notes: The other combinations of \overline{CE} , \overline{PE} , and \overline{OE} , which are not listed in the table are not allowed.

1. X = Don't care

◆ Read Cycle

A combination of \overline{PE} greater than $V_{IH}(\min)$ and \overline{CE} less than $V_{IL}(\max)$ defines a read cycle. When \overline{OE} is asserted, the data can be get from DQ(7:0). Read access time is measured from the latter of chip enable, output enable, or valid address to

valid data output.

Read Cycle 1, the Address Access in Figure 2, is initiated by a change in address inputs while the chip is enabled with \overline{OE} asserted and \overline{PE} deasserted. Valid data appears on data outputs DQ (7:0) after the specified t_{AVQV} is satisfied. Outputs remain active throughout the entire cycle. As long as chip enable and output enable are active, the address inputs may change at a rate equal to the minimum read cycle time (t_{AVAV}).

Read Cycle 2, the Chip Enable-controlled Access in Figure 3, is initiated by \overline{CE} going active while \overline{OE} remains asserted, \overline{PE} remains deasserted, and the addresses remain stable for the entire cycle. After the specified t_{ETQV} is satisfied, the 8-bit word addressed by A (12:0) is accessed and appears at the data outputs DQ (7:0).

Read Cycle 3, the Output Enable-controlled Access in Figure 4, is initiated by \overline{OE} going active while \overline{CE} is asserted, \overline{PE} is deasserted, and the addresses are stable. Read access time is t_{GLQV} unless t_{AVQV} or t_{ELQV} have not been satisfied.

5.2 Recommended Operating Conditions

Table 3. Recommended Operating Conditions

Symbol	Parameter	Limits
V_{DD}	Positive supply voltage	4.5 V ~ 5.5 V
T_C	Case temperature range	-55°C ~ +125°C
V_I	DC input voltage	0 V ~ V_{DD}

\overline{PE} should be tied to V_{DD} when the device is used.

6. Electrical Characteristics

6.1 DC Electrical Characteristics

Table 4. DC Parameter Table

Parameter	Symbol	Condition $-55^{\circ}\text{C} \leq T \leq 125^{\circ}\text{C}; 4.5\text{V} \leq V_{DD} \leq 5.5\text{V}$	Limits		UNIT
			MIN	MAX	
High-level output voltage	V_{OH1}	$V_{DD}=4.5\text{V}, I_{OH}=-2\text{mA}$	3.5	—	V
	V_{OH2}	$V_{DD}=4.5\text{V}, I_{OH}=-100\mu\text{A}$	$V_{DD}-0.3$	—	V
Low-level output voltage	V_{OL}	$V_{DD}=4.5\text{V}, I_{OL}=4.8\text{mA}$	—	$V_{SS}+0.40$	V
Supply current operating @1MHz	$I_{DD(OP)}$	$I_{OUT}=0, V_{IL}=V_{SS}, V_{IH}=V_{DD},$ $\overline{PE}=5.5\text{V}, V_{DD}=5.5\text{V}, f=1\text{MHz}$	—	15	mA
Supply current standby	$I_{DD(SB)}$	$I_{OUT}=0, V_{IL}=V_{SS}, V_{IH}=V_{DD},$ $\overline{CE}=V_{DD}, V_{DD}=5.5\text{V}$	—	10	mA
Input leakage current	I_{IN}	$V_I = 5.5\text{V}$ and 0V , $T_A=25^{\circ}\text{C}$ (all inputs except \overline{PE})	-0.1	0.1	μA
		$V_I = 5.5\text{V}$, $T_A=25^{\circ}\text{C}$ (\overline{PE})	—	10	μA
		$V_I = 5.5\text{V}$ and 0V , $T_A=-55^{\circ}\text{C}$ and 125°C (all inputs except \overline{PE})	-1	1	μA
		$V_I = 5.5\text{V}$, $T_A=-55^{\circ}\text{C}$ and 125°C (\overline{PE})	—	10	μA
Three-state output leakage current	I_{OZ}	$V_O = 0\text{V} \sim V_{DD}$, $V_{DD}=5.5\text{V}$ $\overline{OE}=5.5\text{V}$, $T_A=25^{\circ}\text{C}$	-0.1	0.1	μA
		$V_O = 0\text{V} \sim V_{DD}$, $V_{DD}=5.5\text{V}$ $\overline{OE}=5.5\text{V}$, $T_A=125^{\circ}\text{C}$ and -55°C	-1	1	μA
Input capacitance	C_{IN}	$f=1\text{ MHz}, T_A=25^{\circ}\text{C}$, open V_{DD}	—	17.5	pF
Bidirectional I/O capacitance	C_{IO}	$f=1\text{ MHz}, T_A=25^{\circ}\text{C}$, open V_{DD}	—	12	pF


6.2 Read Cycle AC Electrical Characteristics

Table 5. Read Cycle AC Parameters

Parameter	Symbol	Condition (4.5V≤V _{DD} ≤5.5 V -55 °C≤T _A ≤125 °C)	Limits		Unit
			MIN	MAX	
Read cycle time1	t _{AVAV}	Figure 2	45	—	ns
Read access time23	t _{AVQV}		—	45	ns
Output hold time	t _{AQXQ}		0	—	ns
OE-controlled output enable time1	t _{GLQX}	Figure 3	0	—	ns
OE-controlled output enable time3	t _{GLQV}		—	15	ns
OE-controlled output three-state time4	t _{GHQZ}		—	15	ns
CE-controlled output enable time1	t _{ELQX}	Figure 4	0	—	ns
CE-controlled access time3	t _{ELQV}		—	35	ns
CE-controlled output three-state time4	t _{EHQZ}		—	15	ns
Chip Enable High Width1	t _{EHEL}	Figure 4	20	—	ns
Chip Enable Low Width1	t _{ELEH}		45	—	ns
Read Cycle Time1	t _{ELEL}		65	—	ns
Address Setup Time1	t _{AVEL}		5	—	ns
Address Hold Time1	t _{ELAX}		t _{ELEH}	—	ns


Notes:

1. t_{AVAV} , t_{EHQZ} , t_{EHEL} , t_{ELAH} , t_{ELEL} , t_{AVEL} and t_{ELAX} are guaranteed by the test condition, t_{GLQX} and t_{ELQX} are design guaranteed but not tested.
2. The item is not tested for the blank device.
3. Measurement of data output occurs at the low to high or high to low transition mid-point.
4. Three-state is defined as a 500mV change from steady-state output voltage.

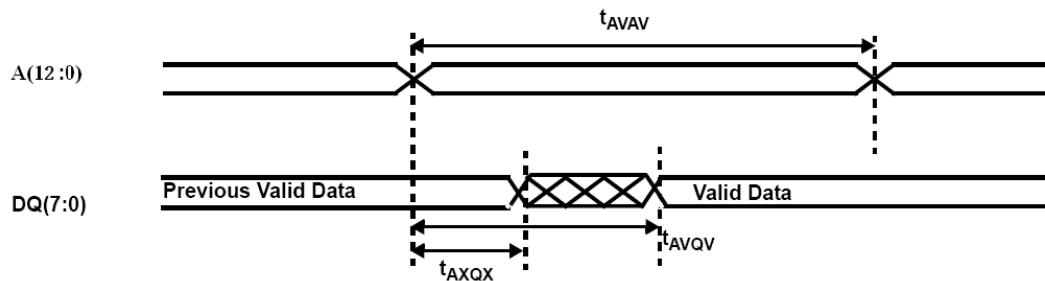


Assumptions: $\overline{CE} \leq V_{IL}(\max)$, $\overline{OE} \leq V_{IL}(\max)$, $\overline{PE} \geq V_{IH}(\min)$

Figure 2. Read Cycle 1: Address Access

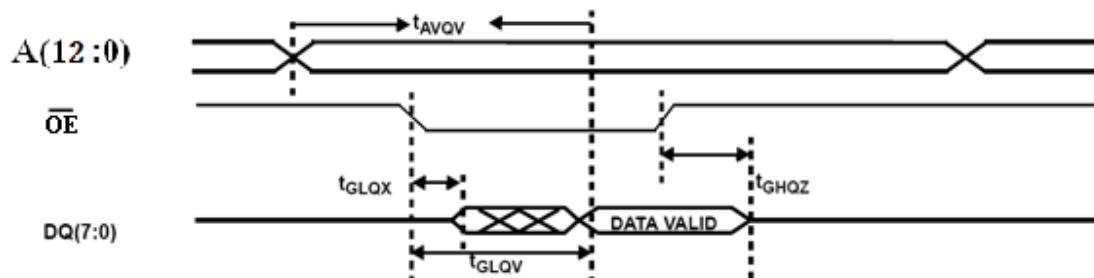

Assumptions: $\overline{CE} \leq V_{IL}(\max)$, $\overline{PE} \geq V_{IH}(\min)$

Figure 3. Read Cycle 2: Output Enable Access


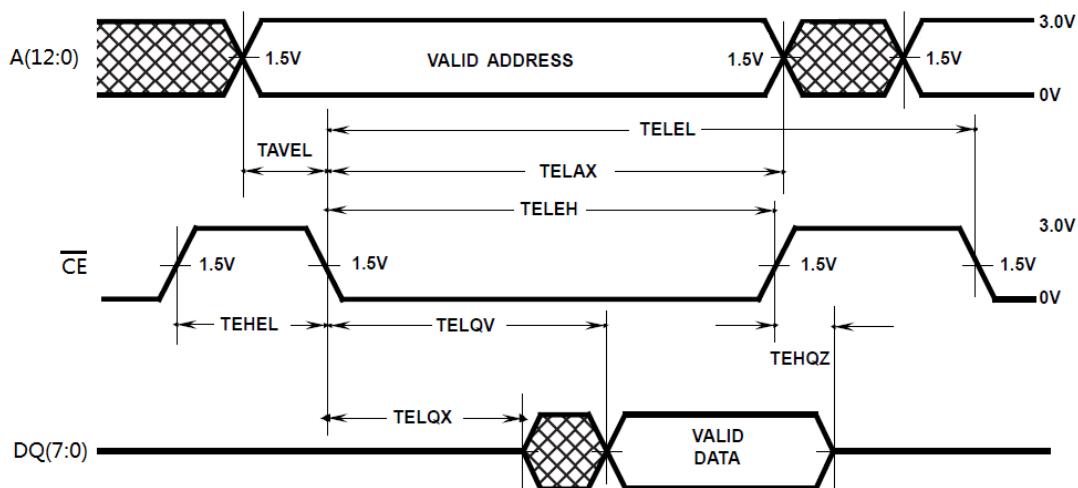


Assumptions: $\overline{OE} \leq V_{IL}(\max)$, $\overline{PE} \geq V_{IH}(\min)$

Figure 4. Read Cycle 3: Chip Enable Access

7. Packaging

The PROM B6664RH utilizes 28-Lead DIP package as shown in Figure 5.

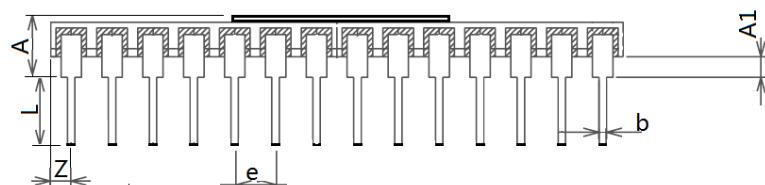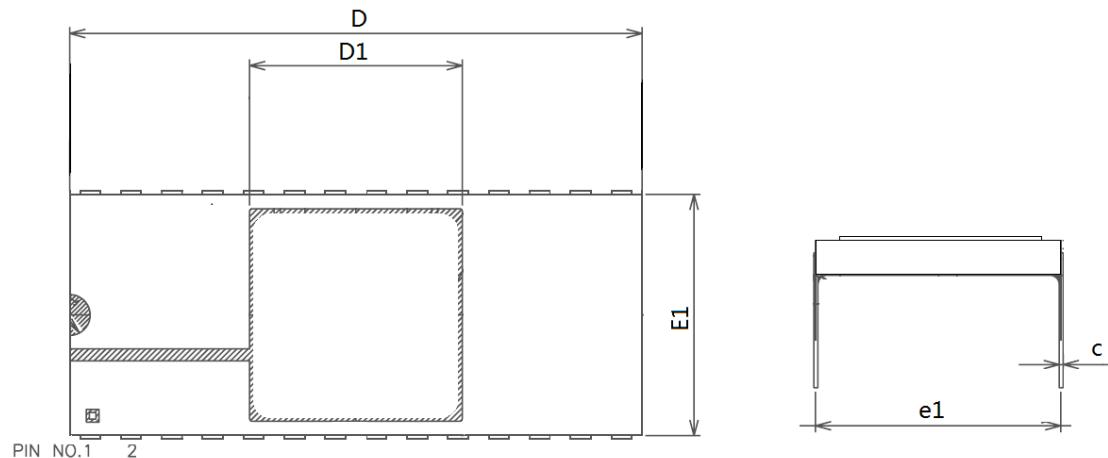

Symbols	Size (unit: mm)		
	Min	BSC	Max
A	2.83	—	4.03
A1	0.72	—	1.82
b	0.20	—	0.70
c	0.10	—	0.40
e	—	2.54	—
e1	14.70	—	16.00
D	34.90	—	36.22
D1	12.70	—	13.70
E1	14.50	—	16.00
Z	0.59	—	1.95
L	2.54	—	4.74

Figure 5. DIP28 Package Outline

Appendix 1

Pin Descriptions are listed in Table 6:

Table 6. Pin Symbols and Functions

Pin No.	Symbol	Functions	Pin No.	Symbol	Functions
1	NC		15	Q3	bidirectional data
2	A12	Address Input	16	Q4	Bidirectional data
3	A7	Address Input	17	Q5	Bidirectional data
4	A6	Address Input	18	Q6	bidirectional data
5	A5	Address Input	19	Q7	Bidirectional data
6	A4	Address Input	20	CE	Chip Enable
7	A3	Address Input	21	A10	Address Input
8	A2	Address Input	22	OE	Output Enable
9	A1	Address Input	23	A11	Address Input
10	A0	Address Input	24	A9	Address Input
11	DQ0	bidirectional data	25	A8	Address Input
12	DQ1	Bidirectional data	26	NC	
13	DQ2	Bidirectional data	27	PE	Program Enable
14	V _{SS}	Ground	28	V _{DD}	5V Power Supply

Service & Supply

Address: No.2. Siyingmen N.Rd. Donggaodi Fengtai District, BeiJing, China

Department: Department of international cooperation

Telephone: +86(0)10-67968115-6751

Email: gjhz@mxtronics.com

Fax: +86(0)10-68757706

Zip code: 100076